



*The People You Know. The Products You Trust.*

## *SuperVac* **Updraft™**

- 2.0 Cubic Yard Hopper
- Conventional Gasoline Chassis
- 6'5" Low Profile
- 24" Whisper Wheel™ Fan System
- 81" Reverse Sweep Pickup Head
- 67" High Dump



*\*Sweeper shown with optional equipment*



**QUALITY - PERFORMANCE - PUBLIC SAFETY**  
**VALUE - CUSTOMER SUPPORT**

800-879-7933

[www.schwarze.com](http://www.schwarze.com)



# SuperVac Updraft™

2.0 Cubic Yard Parking Lot Sweeper



## PUBLIC SAFETY

## QUALITY

**Custom Made-to-Order Hydraulic Hoses:** Reduces the opportunity for contamination in Hydraulic System

**Welded Hopper Assembly:** No leaks

**No butt connectors, all soldered connections:** Increased uptime with the use of severe duty wiring that eliminates shorts caused by poor connections

**Sweeps-In-Reverse™:** Eliminates the need for the operator to raise the sweeping head to reverse

**Backup Alarm:** Variable output backup alarm adjust automatically above the surrounding noise levels

## PERFORMANCE

**16 Inch Diameter Gutter Broom:** Gives operator ability to remove debris from curb line without the need for additional equipment or man hours

**Leaf Bleeder:** Allows you to exhaust up to 80% of the air. This gives the ability to better adjust the airflow based on varying material conditions

**Hardox Steel:** Eliminates the need for a fan coating, and creates a longer Life Expectancy equates to reduced cost of ownership

**67" Dump Height:** Can dump into a standard container without leaving the cab

**Hydraulic Test Ports:** reduces troubleshooting time

**Variable Displacement Piston Pump:** Allows you to control the RPMs & Lower Fuel Consumption

**Bolt On Intake Tube:** Easily Replaceable without the need for Welding

## VALUE



**Financing Available**

The Schwarze SuperVac Updraft™ is a single-engine, conventional chassis mounted parking lot sweeper designed to provide a cost-effective solution for sweeping operations. The SuperVac Updraft™ easily picks up all types of litter associated with parking lot maintenance. The 6'5" low profile unit easily accesses height restricted areas such as parking garages which are inaccessible to larger units. And the 67" high dump design features twin hydraulic

cylinders to ensure easy unloading of even the heaviest debris.

Debris is removed from the surface via the 81" width blast and suction pickup head. The direct drive 24" blower fan allows for variable adjustment for unmatched sweeping performance for debris pickup and exceptional fuel efficiency for light-duty sweeping situations. Come to the people you know, for the products you trust.

Also Available from Schwarze Industries, Inc:



## CUSTOMER SUPPORT



**Parts Availability:** Schwarze original equipment parts are available when you need them.



**Trusted Dealers:** Trusted dealers will support your before and after-purchase needs.



**Empowered and Responsive:** Schwarze People are valued for their commitment to our future.




**Schwarze Products:** Engineered for enhanced sweeping performance and low ownership cost.



**Warranty Support:** Schwarze people are on duty to support you and your equipment.

Schwarze regenerative air sweepers are guaranteed to be free from defects due to faulty materials and/or workmanship for a period of 12 months, or 1200 hours. Liability is limited to replacement of defective parts at factory or authorized dealer. The standard warranties of the chassis and sweeper engine manufacturer shall apply.

The People You Know. The Products You Trust.

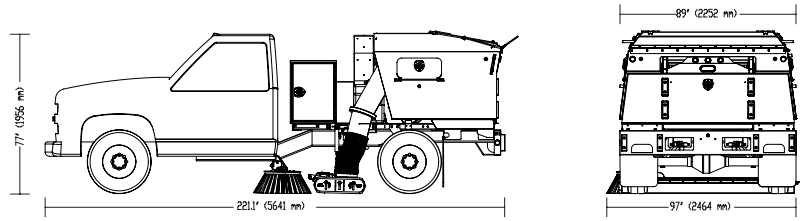

Model shown with optional equipment. Design and specifications subject to change without notice. Specifications may vary depending on chassis type.

<b>General Specifications</b>		<b>Sweeping Head</b>		<b>Hydraulic System</b>	
Total Empty Weight 8,000 lbs (3629kg) Curb Weight 5276 lbs (2393kg) Wheelbase 133" (3378mm) Sweeping Width 81" (2057mm) With One Broom Option 97" (2464mm) Turning Radius 274" (6960mm) Overall Length 221.1" (5641mm) Overall Width 89" (2252mm) Overall Height 77" (1956mm)		<b>Type</b> Blast and Suction (right to left) <b>Operating Direction</b> Forward and Reverse <b>Suspension</b> 2 Trailing Arms; Spring Balanced <b>Length</b> 81" (2057mm) <b>Blast Hose Diameter</b> 10" (254mm) <b>Suction Hose Diameter</b> 10" (254mm) <b>Flap Design</b> 3 Flaps <b>Control</b> Hydraulic Raise and Lower <b>Skids</b> Tungsten Carbide		<b>Type</b> Piston Pump <b>Fluid Capacity</b> 33 gal (150l) <b>Purpose</b> Power Fan, Gutter Broom, Raise/Lower Head and Hopper <b>Cylinders</b> 2 @ 4" x 16" (102mm x 406mm)	
<b>Chassis</b>		<b>Electrical System</b>		<b>Optional Equipment</b>	
A selected truck chassis is provided to give adequate ratings of all components compatible with hopper capacity. Consult factory for detailed requirements.		<b>Battery</b> 12 volt 750 CCA <b>Controls</b> Electric; In-Cab <b>Circuit Protection</b> Automotive Style Fuses		Stainless Steel Hopper Curb Blower Hand Suction Hose Special Paint LED Bar Light – 24" High Visibility Package	
<b>Hopper</b>		<b>Water System</b>		<b>Limited Warranty</b>	
<b>Volumetric Capacity</b> 2.0 cubic yards (1.53 m3) <b>Dumping Material</b> Hydraulic Heavy Guage Steel <b>Dump Height</b> 67" (1702mm) <b>Dumping Tilt Angle</b> 88 Degrees <b>Inspection Doors</b> 1 on Left Side 2 on Right Side <b>Controls</b> Electric; In-Cab <b>Paint</b> Dupont Imron		<b>Tank Capacity</b> 25 gal (95l) <b>Construction</b> Polythylene <b>Pump</b> Electric 12 Volt <b>Controls</b> Electric; In-Cab <b>Filter</b> Fine Mesh Screen <b>Mounting</b> Removable <b>Fill Diameter</b> 3" (76.2mm)		12 month / 1200 hour, 60 month hydraulic system; call for complete details.  NOTE: Specifications are subject to change without notice	
<b>Fan System</b>		<b>Gutter Broom(s)</b>			
<b>Type</b> Whisper Wheel <sup>SM</sup> Turbine <b>Drive</b> Hydraulically Driven, Variable <b>Number of Blades</b> 10 <b>Diameter</b> 24" (610mm) <b>Construction</b> AR Hardox Steel <b>Housing Liner</b> Bolt-In Corded Rubber <b>Mounting</b> Overhung Load Adapter <b>Vacuum Enhancer</b> For Heavy/Light Material		<b>Type</b> Vertical Digger <b>Segments</b> 2, Disposable, Poly <b>Diameter</b> 16" (406mm) <b>Length</b> 8.5" (32mm) <b>Drive</b> Hydraulic Torque Motor <b>Speed</b> Variable <b>Mounting</b> Trailing Arm Design <b>Location</b> Under Cab <b>Suspension</b> Free Floating <b>Wear Adjustment</b> Automatic <b>Impact Protection</b> Spring <b>Tilt Angle Adjustment</b> Manual; At Broom			

Affiliates



Schwarze Industries, Inc.  
 1055 Jordan Road  
 Huntsville, AL 35811  
 Central phone: 256-851-1200

